

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 April 2005 (21.04.2005)

PCT

(10) International Publication Number  
**WO 2005/036510 A1**

(51) International Patent Classification:  
G06F 3/033, G02F 1/133, G09F 9/35

G09G 3/00,

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:

PCT/SE2004/001447

(22) International Filing Date: 12 October 2004 (12.10.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0302711-7 13 October 2003 (13.10.2003) SE  
60/517 314 3 November 2003 (03.11.2003) US

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant and

(72) Inventor: SWEDIN, Anders [SE/SE]; Folke Bernadottes väg 445, S-256 57 Helsingborg (SE).


(74) Agent: AWAPATENT AB; Box 5117, 200 71 Malmö (SE).

Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

[Continued on next page]

(54) Title: TOUCH SENSITIVE DISPLAY DEVICE

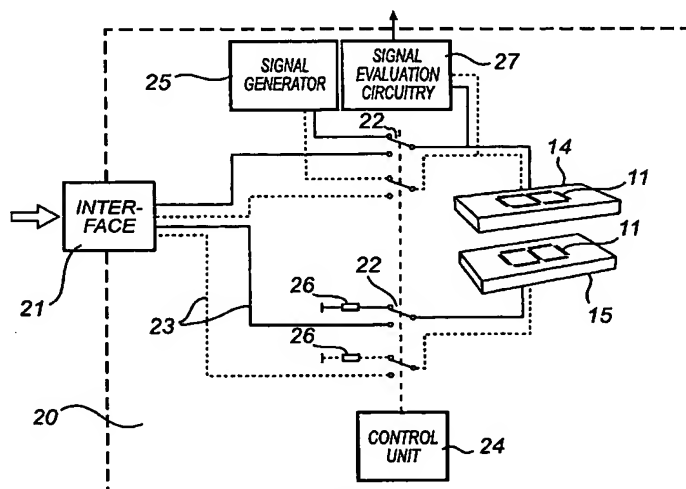

(57) Abstract: A touch sensor is disclosed comprising a display device having a substrate on which substrate at least one display electrode is disposed for the display of a shape on the display device. An interface is coupled to the at least one display electrode for receiving display data to the display device. Moreover is a measuring circuit coupled to the at least one display electrode. Switching means are provided for connecting the interface to the at least one display electrode when the switching means is in a first state of operation and connecting the measuring circuit to the at least one display electrode when the switching means is in a second state of operation.



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*